

CXP-402 TL FLASH V2

LIGHTWEIGHT ANTI-BALLISTIC SHIELDS

Product application	Tactical anti-ballistic shield (briefcase)
Type of protective cover	Black textile
Composition	<ul style="list-style-type: none"> • HPPE
Dimensions	<ul style="list-style-type: none"> • 470 x 1000 mm ± 5 mm (Deployed) • 470 x 470 mm ± 5 mm (Folded)
Protected Area	<ul style="list-style-type: none"> • 450 x 100 mm ± 5 mm
Weight	<ul style="list-style-type: none"> • 9,5 kg ± 0,5 kg
Shape	<ul style="list-style-type: none"> • Flat
Included features	<ul style="list-style-type: none"> • Moulded handle for hand held - ambidextrous • Forearm strap • Strap for shoulder held • Magnetic quick release buckle to secure/ deploy the shield • Velcro patch for identification
Created	September 1, 2023



SPECIAL THREATS TESTED

Test temperature of 20°C
Multi hit (100 mm between shots)
<ul style="list-style-type: none"> • 7.62 x 39 PS-Ball MSC (720 m/s ± 10 m/s) • 7.62 x 51 M80 (NIJ 0108.01, level III)
The above list of ammunition is not exhaustive and may not include threats that can be defeated by this product.



GUARANTEE PERIOD

The shield is expected to preserve its conformity with the specifications for a period of at least 5 years during storage from the date of delivery, provided that:
<ul style="list-style-type: none"> • The product is stored under dry conditions at normal ambient temperature • The product is stored vertically • The product has not been subjected to peak temperature exceeding 70°C • The product is protected against long term direct exposure to sun light

HANDLING

<ul style="list-style-type: none"> • Keep away from intense heat source • Do not drop the shield on the floor and avoid hard shocks • Do a visual inspection of the shield every six-months • In case of visual damage, send the shield back for inspection/repair • Only clean with pure water and mild soap • Use only as a shield, do not sit or walk on it
--

Although Integris has used diligent care to ensure that the information provided in this document is accurate and up to date, Integris makes no representation or warranty, express or implied, as to the accuracy, reliability or completeness of the information. In no event shall Integris be liable for any damages arising from the reader's reliance upon, or use of, the information or materials contained in this document. The reader shall be solely responsible for any interpretation or use of this information and materials. The content of this document is subject to change without further notice. Please contact your Integris representative for more details.




LIGHTWEIGHT ANTI-BALLISTIC SHIELDS

Unfold the flash

1. Carry the shield by one of the two inner handles.
2. Pull the orange strap of the magnetic buckle downward
3. Shield is deployed

Fold the flash

1. Lay the shield flat, inner face visible (face with the textile handle).
2. Lift the panel 1 from the panel 2.
3. Stack the panel 3 over the panel 2.
4. Start pushing the panel 2 and 3 under the panel 1. Watchout to put the metal buckle first.
5. Put the briefcase vertically and the 3 panels will enter in the textile cover.
6. Take the metal buckle and the tightening sling.
7. Clip the metal buckle.
8. Pull on the sling to tighten and obtain a good support of the panels inside the cover.

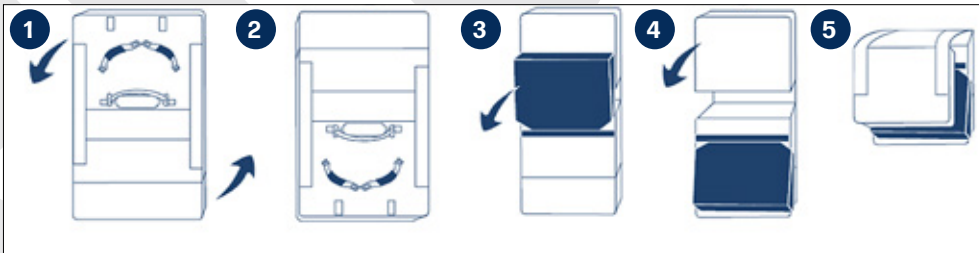

Although Integrus has used diligent care to ensure that the information provided in this document is accurate and up to date, Integrus makes no representation or warranty, express or implied, as to the accuracy, reliability or completeness of the information. In no event shall Integrus be liable for any damages arising from the reader's reliance upon, or use of, the information or materials contained in this document. The reader shall be solely responsible for any interpretation or use of this information and materials. The content of this document is subject to change without further notice. Please contact your Integrus representative for more details.



INTEGRIS